

**Product Feature**

- ◆ Input Voltage: 108~305Vac;
- ◆ Surge immunity: DM-4KV, CM-6KV;
- ◆ Protection: SCP, OVP;
- ◆ IP67 design for indoor and outdoor applications

**Application**

- ◆ LED street lighting, industrial lighting and landscape lighting.

**DESCRIPTION**

The EHC-060W is a 60W, constant-current, IP67 LED driver that operates from 108-305 Vac input with excellent power factor and low THD. It is created for industrial lights, tunnel and street lights. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input over voltage, output over voltage, short circuit, and over temperature.

**Models**

Model Number	Input voltage range(Vac)	Max Output Power (W)	Output Voltage Range (Vdc)	Output current (A)	Typical Efficiency	Typical THD	Typical PF	
							120Vac	230Vac
EHC-060B086	108-305	60W	48-86	0.70	88%	10%	0.99	0.97
EHC-060B070	108-305	60W	35-70	0.86	88%	10%	0.99	0.97
EHC-060B057	108-305	60W	34-57	1.05	87%	10%	0.99	0.97

**Remark:** All specifications are measured at 25C ambient temperature, if no specific note.

**INPUT SPECIFICATIONS**

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	108Vac	120-277Vac	305Vac	Please refer to the Derating curve
Input Frequency	47HZ	50/60	63Hz	
Leakage Current	-	-	0.75mA	240V/60Hz
Input AC Current	-	-	0.80A	120-277Vac with full load
Inrush Current(I <sub>zt</sub> )	-	-	0.01A <sup>2</sup> S	230Vac input, Ta=25°C (cold start)
Power Factor	0.95	0.97	-	230Vac with full load
THD	-	-	20%	120-230Vac with 70%-100% load
THD	-	-	15%	120~230Vac with full load

**OUTPUT SPECIFICATIONS**

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-8%I <sub>set</sub>	-	8%I <sub>set</sub>	Full load
Total Output Current Ripple (pk-pk)	-	150%	200%	Full load & LED Load, ripple is different with difference LED load. 20MHz BW
Startup Overshoot Current	-	10%	20%	120~277Vac & Full load, LED Load
No Load Output Voltage EHC-060B086 EHC-060B070 EHC-060B057	-	-	115V 100V 85V	
Line Regulation	-	-	±8%	25°C±10°C ambient temperature, input voltage changes from 120Vac to 277Vac.
Load Regulation	-	-	±8%	25°C±10°C ambient temperature, 230Vac input, load changes from 60% to 100%.
Turn-on Delay Time	-	-	3S	120Vac, 100% load
	-	0.5S	1S	230Vac, 100% load

## GENERAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Notes
Efficiency @115Vac EHC-060B086 EHC-060B070 EHC-060B057	85% 85% 84%	86% 86% 85%		Measured at full load and 25°C ambient temperature
Efficiency @230Vac EHC-060B086 EHC-060B070 EHC-060B057	87% 87% 86%	88% 88% 87%		Measured at full load and 25°C ambient temperature
Efficiency @277Vac EHC-060B086 EHC-060B070 EHC-060B057	86% 86% 85%	87% 87% 86%		Measured at full load and 25°C ambient temperature
MTBF	-	200000Hours	-	230Vac,80% load (MIL-HDBK-217F)
Lifetime	-	50000Hours	-	230Vac&100% load,70°C case temperature, refer to lifetime VS Tc curve for details
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+75°C	5 Years Warranty Humidity: 10% to 95% RH
Storage Temperature	-40°C	-	+90°C	Humidity: 10% to 95% RH
Dimensions (LxWxH)mm	111*64*33mm			
Net Weight	400±50g/PCS			
Package	L480xW275xH208mm;			


## SAFTY STANDARDS

Safety Category	Country / Territory	Standards
CCC	China	GB19510.1, GB19510.14
CE	Europe	EN61347-1, EN61347-2-13
CB	CB Countries	IEC61347-1, IEC61347-2-13
UL	USA	UL 8750, UL 1310(Class 2 Power Units), UL 1012
CUL	Canada	CSA C22.2 No.107.1-01, CSA C22.2 No.223-M91 (Power Supplies With Extra-Low-Voltage Class 2 Outputs)
KC	South Korea	K61347-1, K61347-2-13, K62384
PSE	Japan	J61347-1, J61347-2-13
SAA	Australia	AS/NZS IEC 61347-2-13
		AS/NZS 61347.1


### EMC COMPLIANCE

EMC Category	Country / Territory	Standards
CCC	China	GB 17743, GB 17625.1
CE	Europe	EN 55015, EN 61000-3-2, EN 61000-3-3
		EN61000-4-2,3,4,5,6,8,11
		IEC 61547
KC	South Korea	K61547
		K00015
PSE	Japan	J55015
FCC	USA	FCC part 15


### INRUSH CURRENT WAVEFORM

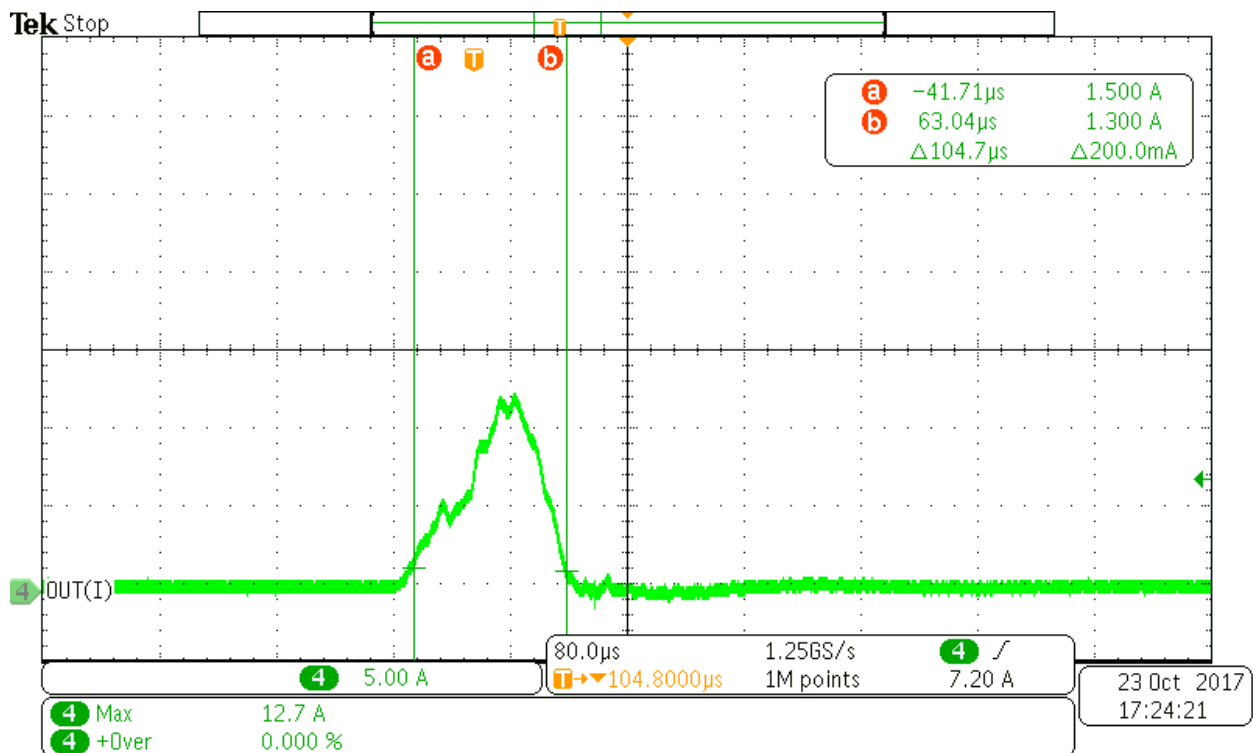


### DERATING CURVE

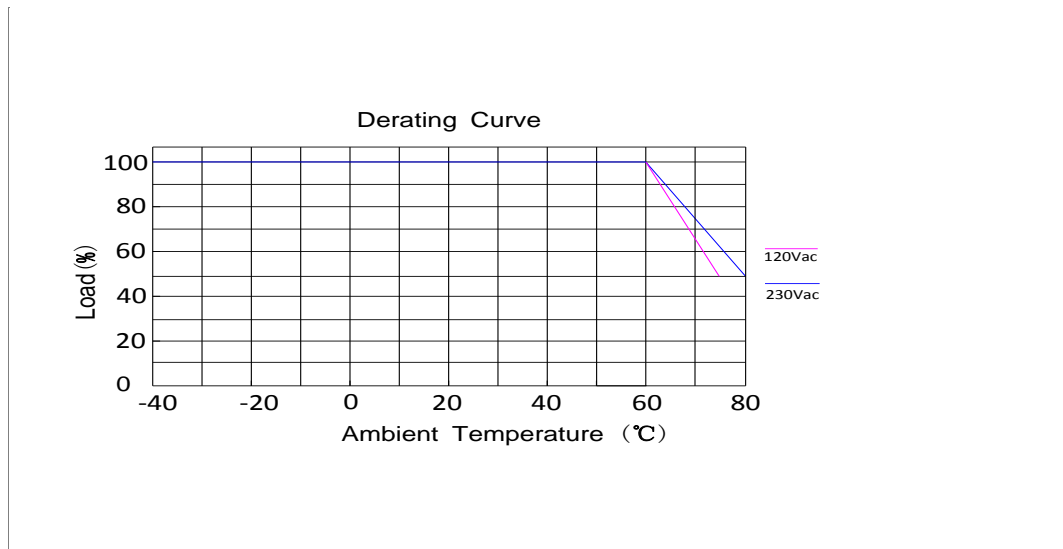


### OUTPUT POWER VS INPUT VOLTAGE

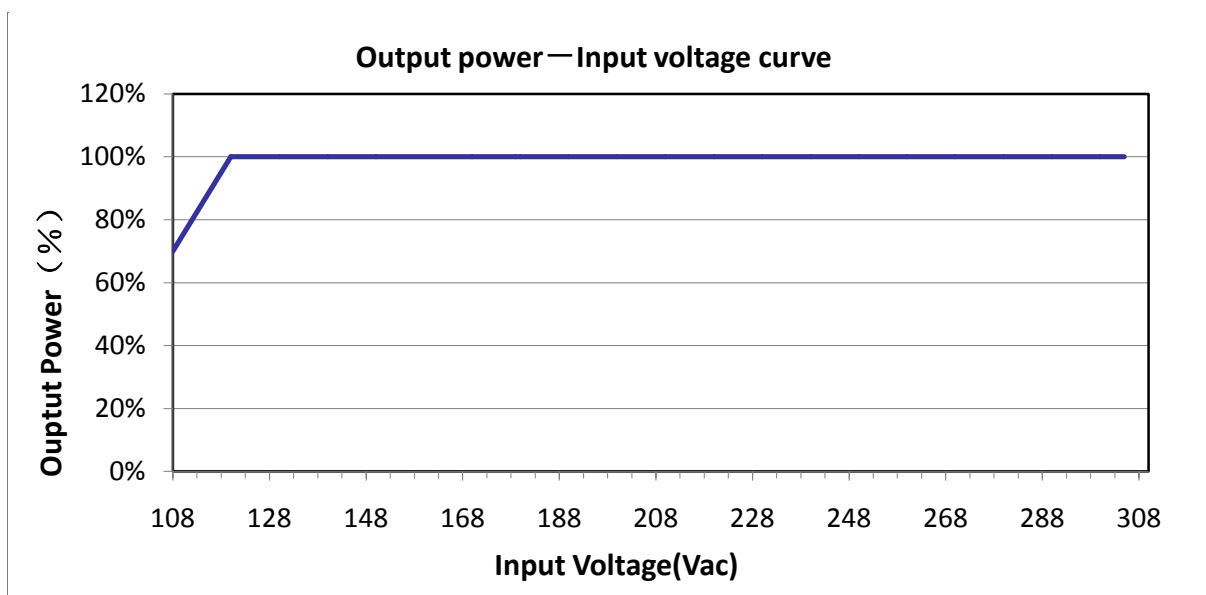


### LIFETIME VS CASE TEMPERATURE

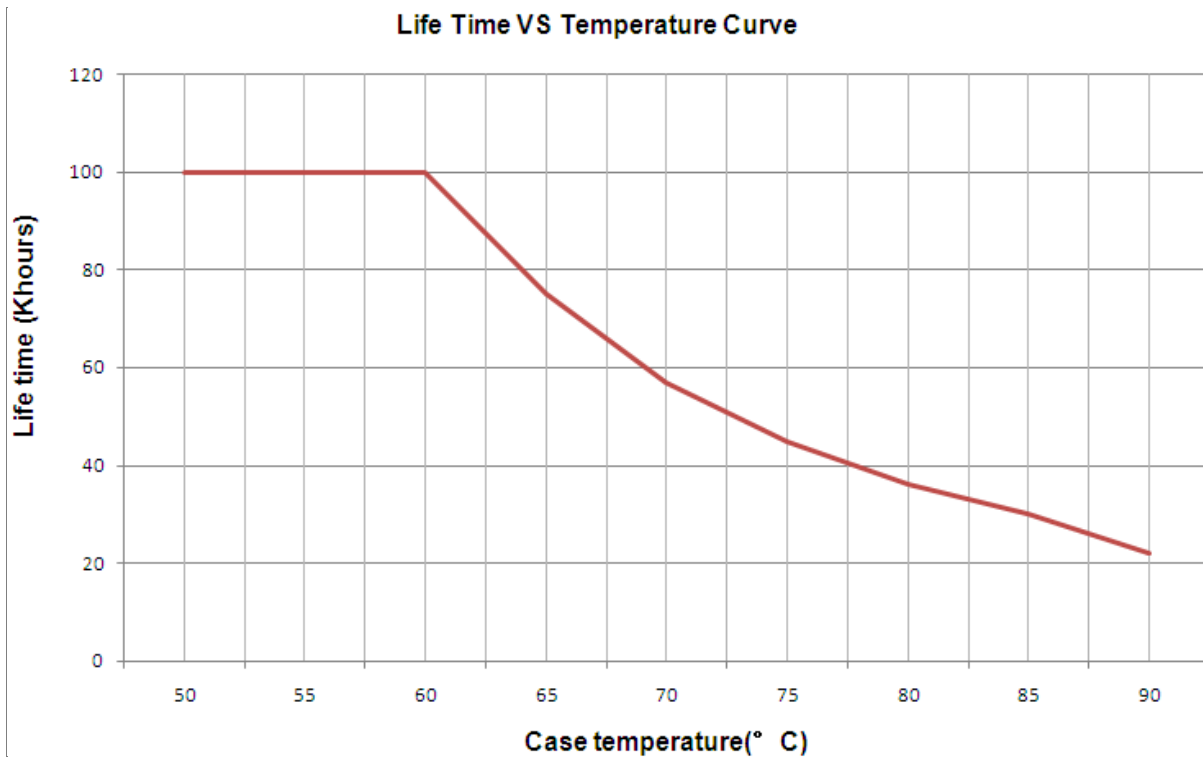


### EFFICIENCY VS LOAD

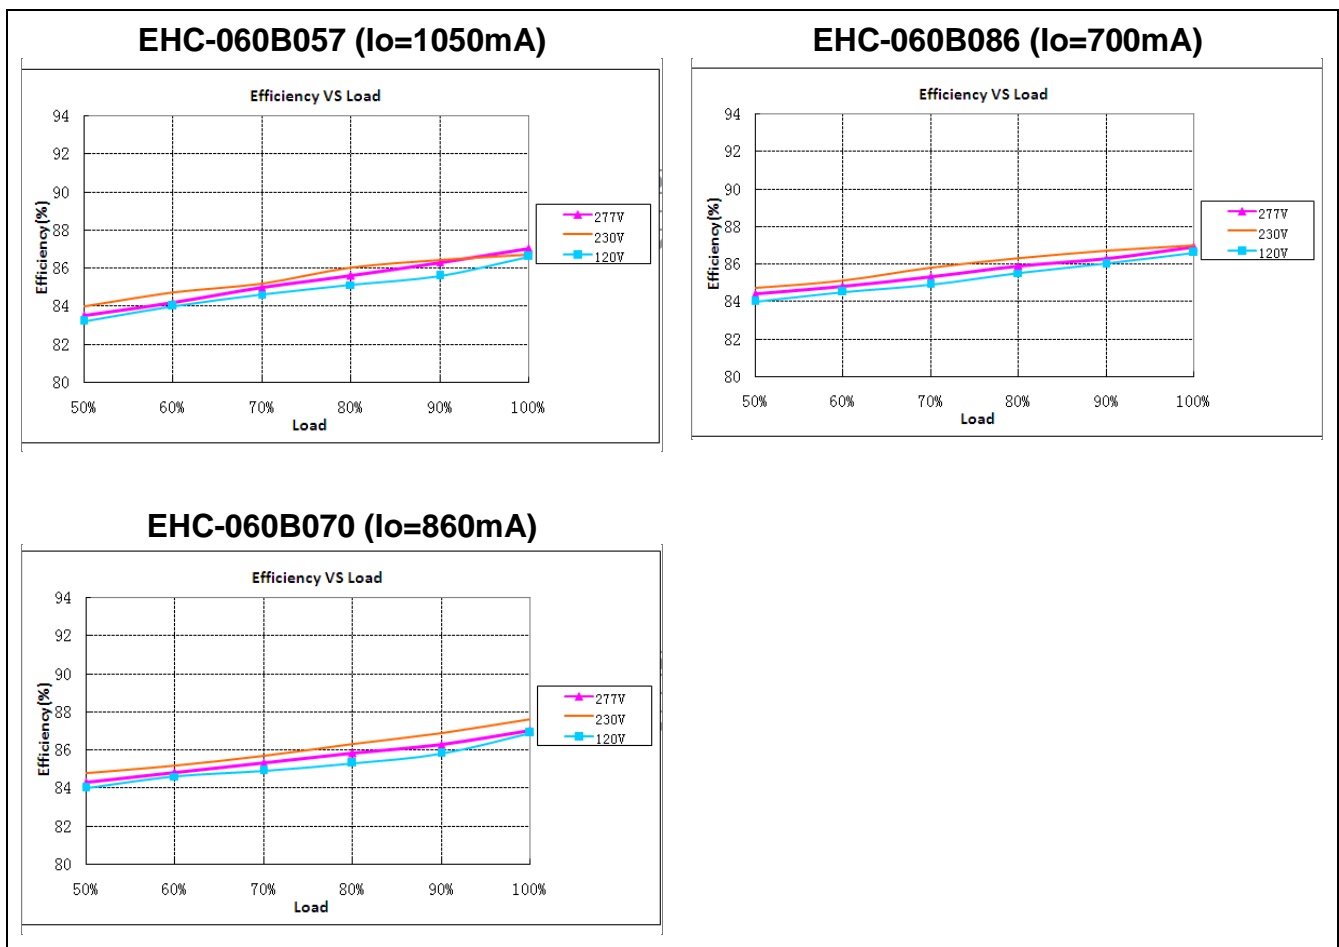

### POWER FACTOR VS LOAD

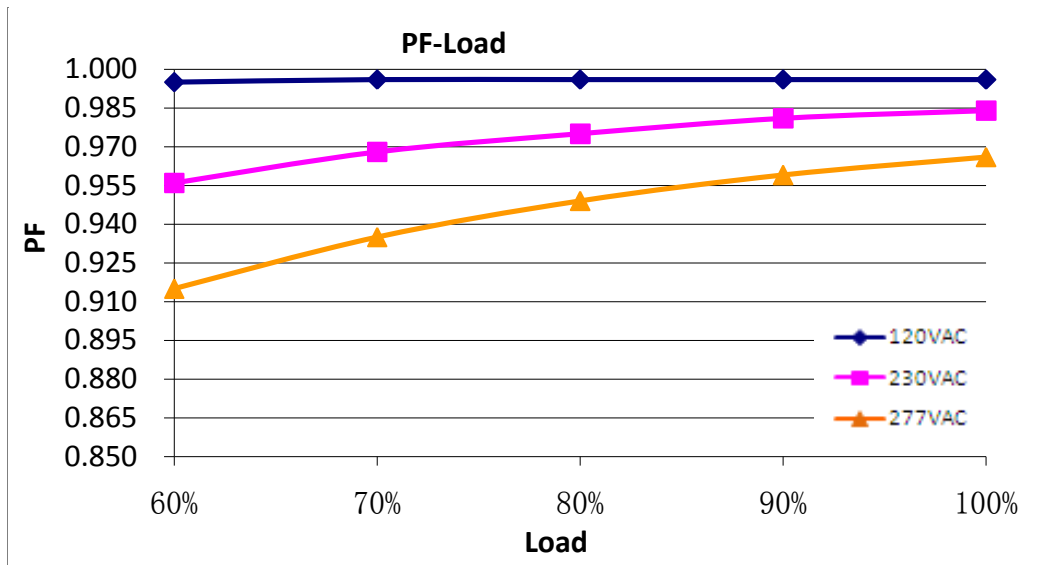


### TOTAL HARMONIC DISTORTION

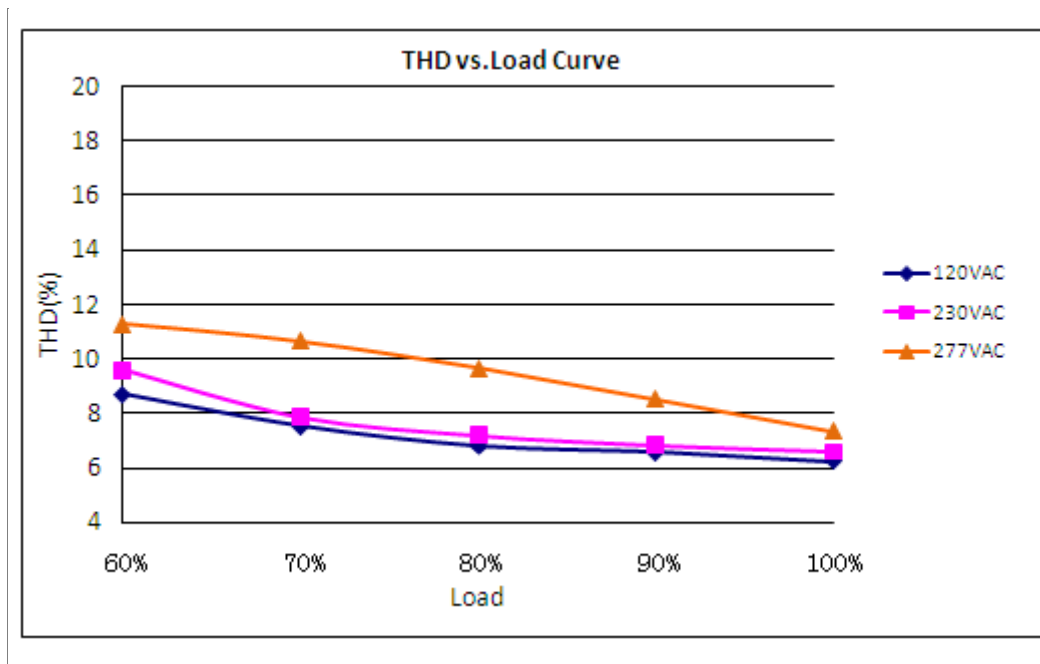

### PROTECTIONS

Parameter		Min.	Typ.	Max.	Notes
Input Over Voltage Protection	Input Protection Voltage	310Vac	380Vac	440Vac	Turn off the output when the input voltage exceeds protection voltage.
	Recovery Voltage	300Vac	320Vac	340Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	440Vac	The driver can survive for 48 hours with input over-voltage of 440Vac.
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Short Circuit Protection		Hiccup mode and auto recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Output Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fail			

### MECHANICAL OUTLINE

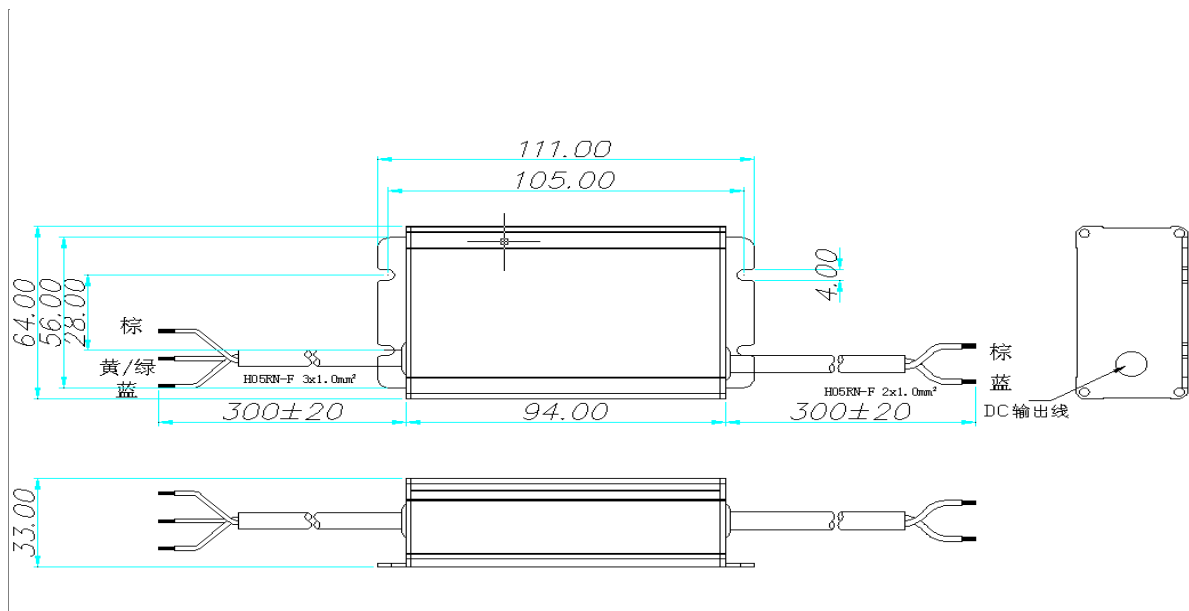



**REVISION HISTORY**

Version	Description of Change		Date	Notes
	Before	Now		
A.1	—	Datasheets Release	2017-10-31	